

# LED Fluorescent Light



## INTRODUCTION

### Benefits:

1. Solid-state, high shock/vibration-resistant
2. No RF interference, no buzzing noise
3. No fluorescent flickering
4. No hazard of mercury
5. No danger of broken glass
6. Maintenance free, easy installation
7. Low power consumption, high intensity

### Applications:

1. Bus, rail car passenger interiors
2. Uninterrupted emergency lighting
3. Focused reading and task lighting
4. Interior design uses
5. Closet illumination
6. Concealed accent lighting
7. Cubicle, workbench lighting




AL+PC LED T8 tubes


## SPECIFICATIONS

Model NO.	GNY-T870621-W	GNY-T870921-W	GNY-T871209-W	GNY-T871509-W
Size	L610*W26*H30MM	L910*W26*H30MM	L1213*W28.5*H32MM	L1498*W28.5*H32MM
Power	9W	12W	18W	22W
Voltage	AC100-240V	AC100-240V	AC100-240V	AC100-240V
Frequency	50/60Hz	50/60Hz	50/60Hz	50/60Hz
Power factor	>0.9	>0.9	>0.9	>0.9
LED quantity	60PCS 2835	72PCS 2835	120PCS 2835	144PCS 2835
Luminous flux	810LM	1050LM	1600LM	2100LM
Beam angle	180°	180°	180°	180°
CRI	≥70	≥70	≥70	≥70
Base	G13	G13	G13	G13
Color temperature	WW:2800K-3200K NW:4000K-4500K CW:6000K-6500K			
Materials	AL+PC	AL+PC	AL+PC	AL+PC
Working temperature	-20~+50°C	-20~+50°C	-20~+50°C	-20~+50°C
Lifespan	≥40000H	≥40000H	≥40000H	≥40000H
Weight	200g±5%	250g±5%	300g±5%	400g±5%
Warranty	2 years	2 years	2 years	2 years
Certification	CE ROHS	CE ROHS	CE ROHS	CE ROHS

## SIZE



## PACKING INFORMATION

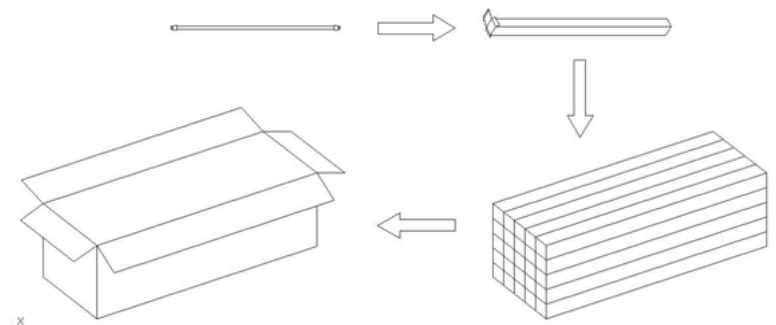

Model NO.	GNY-T870621-W	GNY-T870921-W	GNY-T871209-W	GNY-T871509-W
QTY	25PCS	25PCS	25PCS	25PCS
N.W	5KG	6.3KG	7.5KG	10KG
G.W	7.5KG±5%	8.8KG±5%	10KG±5%	12.8KG±5%
MEAS	680*200*200mm	980*200*1200mm	1230*200*220mm	1580*200*220mm