

# LED Fluorescent Light



## INTRODUCTION

### Features:

1. Energy Saving: Direct current driver, lower power consumption, the energy transform rate reaches 95%, saving 70% electricity compared with traditional light, with the same illumination efficiency.
2. Low Heat Emitting: Traditional light generate abundant of heat, while LED tube transfer the electric energy into light energy, no waste, and will not harmful
3. Long Life Span、 High Brightness: Mainly adopted 2835 SMD high brightness chip.
4. Easy Mounting: The users owned the light holders, move away the starters or electrical ballast(cut off the wire of ballast, connect the AC voltage).

### Applications :

Suitable for showcase windows, cafes, restaurants, gift shop artwork, museum and deparment stores for merchandise displaying. Also good for family living room and bedroom's lighting and decoration.



GNL - YTH-ALT8 - 48SMD-12W-CW-D

## NAMING RULES

GNL - YTH-ALT8- 48SMD-12W-CW-D


- Company name:G-NOR(GNL)
- all-in-one
- aluminum T8
- length
- Power
- Color

## SPECIFICATIONS

Light source parameters	
LED type	SMD 2835
Angle( $\theta$ )	120°
LED Qty	96PCS
Life Span	>30,000 hours
Electrical parameters	
Luminous flux(lm)	1600lm
Voltage	100V-240VAC
Power	18W

Appearance parameters	
Size	35*30*1200mm
Color	CW/WW
Shell information	
material	aluminum
Environmental parameters	
Working Temperature	-30 C - +60 C
Storage Temperature	-50 C - +80 C
Warranty	24Months


CE RoHS

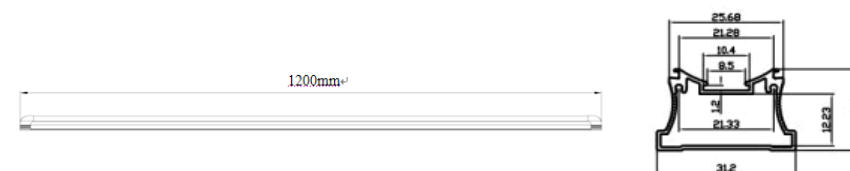

Unit:mm



## PACKING INFORMATION

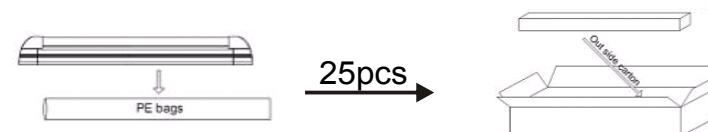

Electrostatic bag size	1230*38*38mm
Outside packing carton	1240*210*220mm
Packing Qty	25PCS
Net weight	5.7kg
Gross weight	6.7kg