





## 1、 Parameter

Part NO.	LED model	LED NO. (pcs)	Voltage	Power	Lifespan (hours)	Working conditions	Color	Peak Wavelength (nm)	View Angle
GNL-SER-5050UEC-30	5050UEC	30	12VDC	7.2W	30,000 to 50,000	-20℃to+40℃	RED	625nm	120°
GNL-SER-5050UYC-30	5050UYC	30	12VDC	7.2W	30,000 to 50,000	-20℃to+40℃	Yellow	590nm	120°
GNL-SER-5050UBC-30	5050UBC	30	12VDC	7.2W	30,000 to 50,000	-20℃to+40℃	Blue	470nm	120°
GNL-SER-5050PGC-30	5050PGC	30	12VDC	7.2W	30,000 to 50,000	-20℃to+40℃	Green	520nm	120°
GNL-SER-5050UWC-30	5050UWC	30	12VDC	7.2W	30,000 to 50,000	-20℃to+40℃	White	5000k-7000k	120°
GNL-SER-5050UWC-Y-30	5050UWC-Y	30	12VDC	7.2W	30,000 to 50,000	-20℃to+40℃	Warm White		120°
GNL-SER-5050RGB-30	5050RGB	30	12VDC	7.2W	30,000 to 50,000	-20℃to+40℃	RGB		120°

## 2、 Dimensions

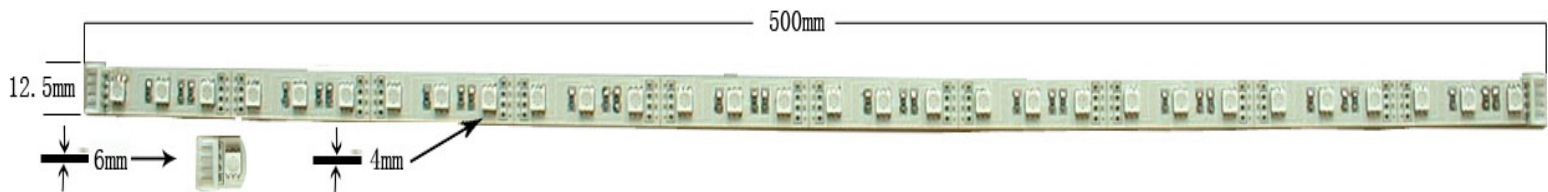

## 3、 cutting

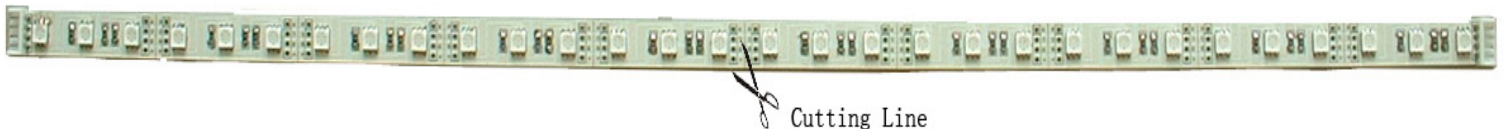

4、 Connect

