

LED Globe Light



INTRODUCTION

Features

- Complied with CE & RoHS
- Friendly environment and power saving
- Long life Span, up to 5 years life
- Reduces energy consumption more than 60%
- High intensity LED unit
- Low voltage and high brightness
- No UV or IR radiation, Mercury free and no flickering
- Replacement of traditional existing incandescent bulb

Applications


Indoor any places,
Accent lighting,
General lighting,
Art galleries, Hotels,
Museums, Offices,
Restaurants, Retail



GN-HP-WW3W-G50-E14-P

NAMING RULES

GN - HP - WW 3W - G50 - E14 - P

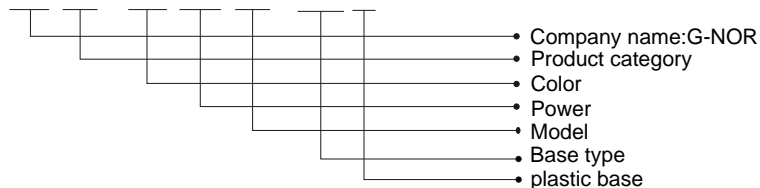


SPECIFICATIONS

Light source parameters	
LED type	SMD 2835 LED
Angle(θ)	120°
LED Qty	15PCS
Life Span	>30,000 hours
Electrical parameters	
Luminous flux(lm)	65lm/W
Voltage	220VAC
Power	3W

Appearance parameters	
Size	48*83mm
Color	WWCW
Installation method	
Base type	E14
Environmental parameters	
Working Temperature	-30℃ - +60℃
Storage Temperature	-50℃ - +80℃
Warranty	24Months

CE RoHS

SIZE

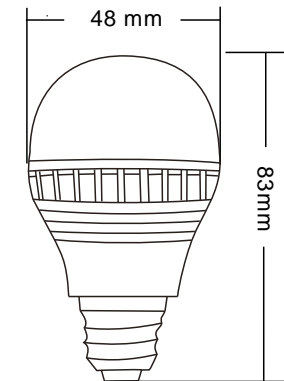

PACKING INFORMATION



1pcs →



24pcs →



Electrostatic bag size	51*51*85mm
Outside packing carton	225*265*115mm
Packing Qty	24PCS
Net weight	1kg/1Box
Gross weight	1.2kg