

# LIGHTEN OUT YOURS LIFEWAY


**FEATURES:**

- Instead of Neon lamp, As a light source apply to Channel Letter, Sign...
- Use ultra brighter wide view angle Flux LED lamp. the power consumption should 80% lower than neon lamp.
- Non-break, professional technology of epoxy sealing and consistent current. 50,000 hours operating life.
- Easy Installation using fixation clip.
- Environment temperature -40°C - +85°C; Humidity ≤90%
- Suggestion: Channel Letter slot depth 100mm

**GN-CLM-6E**




**Dimensions of LED modules (UNIT: mm)**

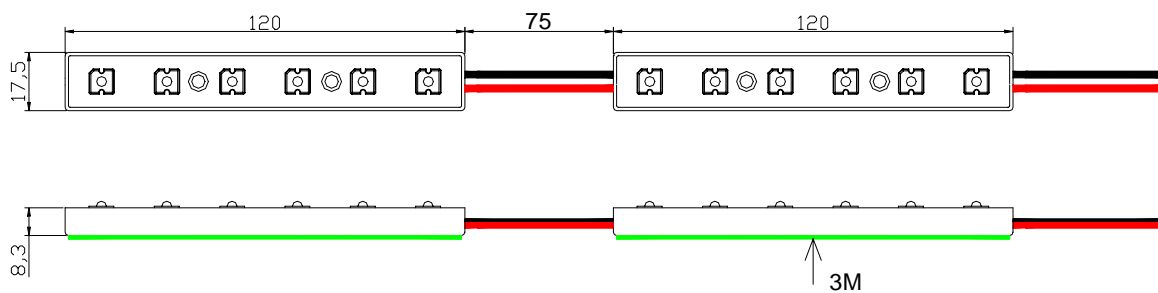


# LIGHTEN OUT YOURS LIFEWAY

## Sample of how to drive the modules


GNVA12030M

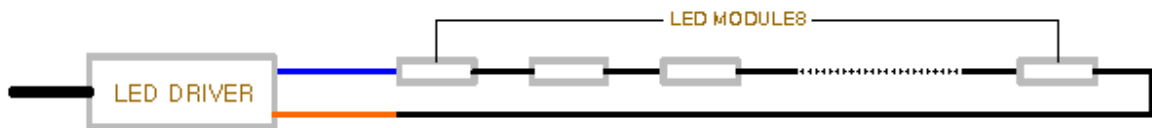

GNVA12060P

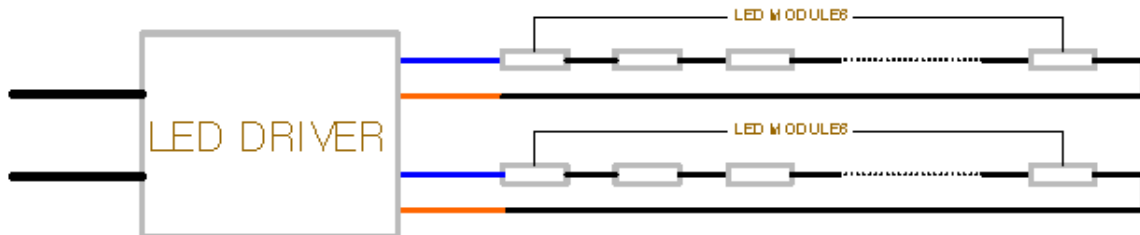

GNVA-12150T

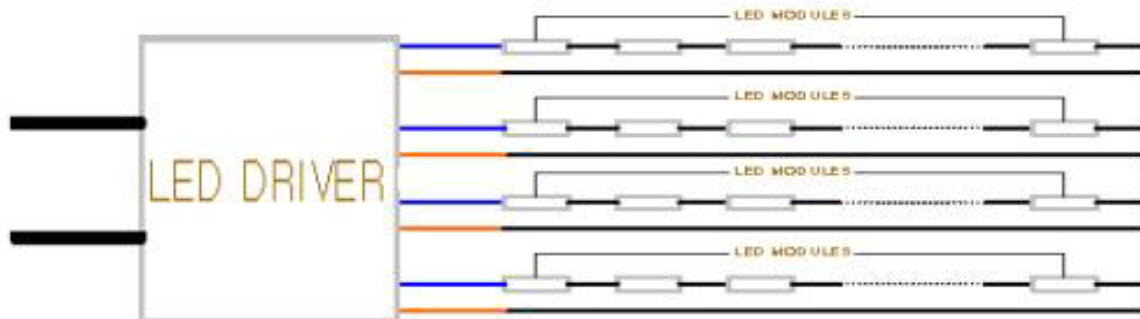

G-NOR

# LIGHTEN OUT YOURS LIFEWAY

## Data specification

Part No.	Color	Wavelength	Voltage	LED No.	Wire	Lumen	View angle
GN-CLM-6RE	Red	629nm	12VDC	6	75mm	10.8lm	120°
GN-CLM-6YE	Yellow	594nm	12VDC	6	75mm	10.8lm	120°
GN-CLM-6GE	Green	525nm	12VDC	6	75mm	15.0lm	120°
GN-CLM-6BE	Blue	470nm	12VDC	6	75mm	9.0lm	120°
GN-CLM-6WE	White		12VDC	6	75mm	21.0lm	120°

TYPE OF LED MODULES	TYPE OF LED DRIVERS		
	GNVA-12030M PCS/DRIVER	GNVA-12060P PCS/DRIVER	GNVA-12150T PCS/DRIVER
GN-CLM-6RE	Max.45	Max.90	Max.225
GN-CLM-6YE	Max.45	Max.90	Max.225
GN-CLM-6GE	Max.50	Max.100	Max.250
GN-CLM-6BE	Max.50	Max.100	Max.250
GN-CLM-6WE	Max.50	Max.100	Max.250

**Power Supply:** LED special power supply.

**Standard pack:** 100 modules per pack.

**Mounting:** Adhesive tape on the back of the module or bolt.

**Tel:** (86 574) 87503097, 87502706, 87503023

**Fax:** (86 574) 87503457

**E-mail:** info@g-nor.com

**G-NOR** 