

F8 RGB light string




Product useful



Specification

- **Input Voltage:DC5V**
- **Work Current:0.06A**
- **Work Temperature:-40°C~85°C**
- **Material:Hardy PVC sheathed transparent epoxy encapsulation AB**
- **Waterproof Grade:IP68**
- **Circuitry:Parallel**
- **Product size:8mm**
- **Installing hole diameter:12mm**

Install

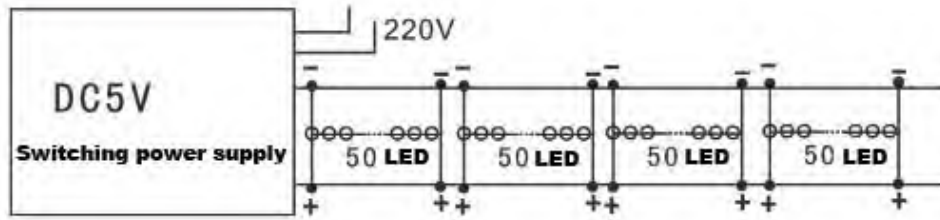

1. Each line up 100 pcs
2. Main copper line minimum need 1.5 square diameter

Controller



Datasheet

Part Number	Color	Wavelength(nm)	Voltage	LED NO.	Power(W)	Intensity(mcd)
GN-50RBF8	RGB	625/520/460	DC5V	50	20	800-1000/3000-4000/800-1000