


F8 Monochromatic light string




Product useful

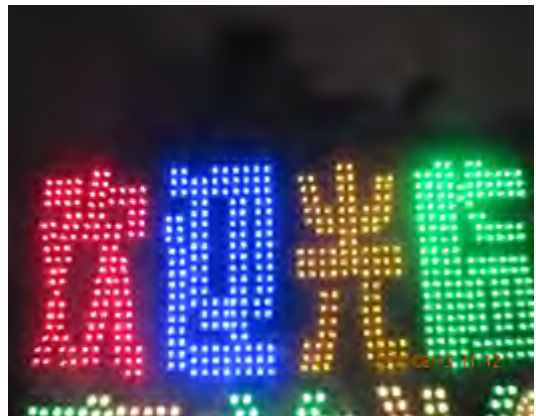


Specification

- Input Voltage:DC5V DC24V
- Work Current:0.02A
- Work Temperature:-40°C~85°C
- Material:Hardy PVC sheathed transparent epoxy encapsulation AB
- Waterproof Grade:IP68
- Circuitry:Parallel, Series
- Product size:8mm
- Installing hole diameter:11mm

Install

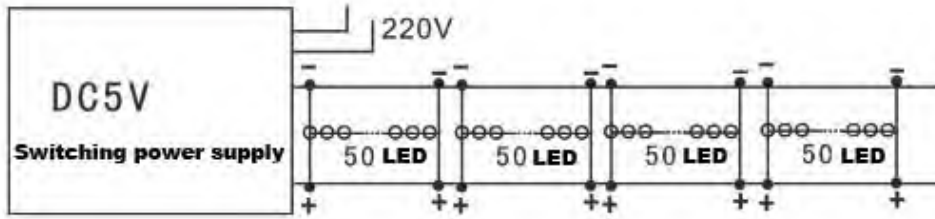

1. Each line up 300 pcs
2. Main copper line minimum need 1.5 square diameter

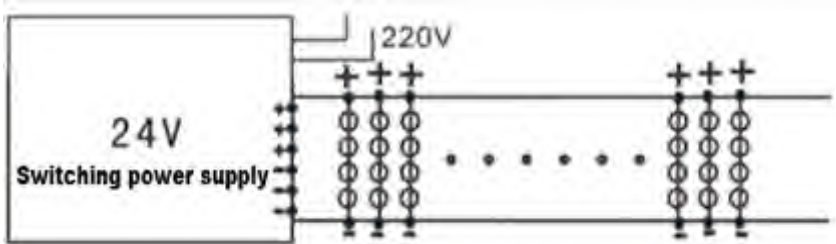

1. Each path can take 500 pcs ,350W power can take 6 road
2. Main copper line minimum need 1.5 square diameter

Datasheet

Part Number	Color	Wavelength	Voltage	LED NO.	Power(W)	Intensity(mcd)
GN-50RF8	Red	625nm	DC5V	50	5	800-1000
GN-50YF8	Yellow	590nm	DC5V	50	5	800-1000
GN-50BF8	Blue	460nm	DC5V	50	5	800-1000
GN-50GF8	Green	520nm	DC5V	50	5	3000-4000
GN-50WF8	White	7000K	DC5V	50	5	2000-3000

Part Number	Color	Wavelength	Voltage	LED NO.	Power(W)	Intensity(mcd)
GN-10RF8	Red	625nm	DC24V	10	0.48	800-1000
GN-10YF8	Yellow	590nm	DC24V	10	0.48	800-1000
GN-7BF8	Blue	460nm	DC24V	7	0.48	800-1000
GN-7GF8	Green	520nm	DC24V	7	0.48	3000-4000
GN-7WF8	White	7000K	DC24V	7	0.48	2000-3000