


T5 LED Fluorescent Lamp

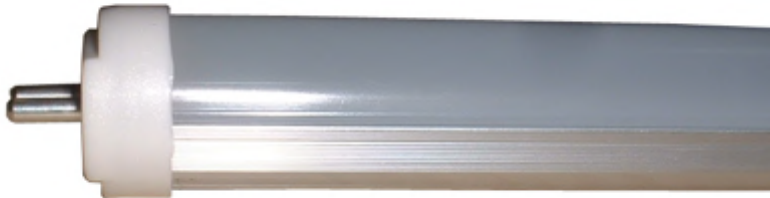



Feature

- Aluminium body
- Moisture resistant
- Input voltage: 12VDC 24VDC
- 1 inch spacing per LED
- LED life: About 50,000 hours

Application

- Neon daylight-lamp replacement
- Fluorescent lamp and cabinet lamp replace
- Ideal for room lighting, step lighting, floodlight and so on

Dimensions Of Products

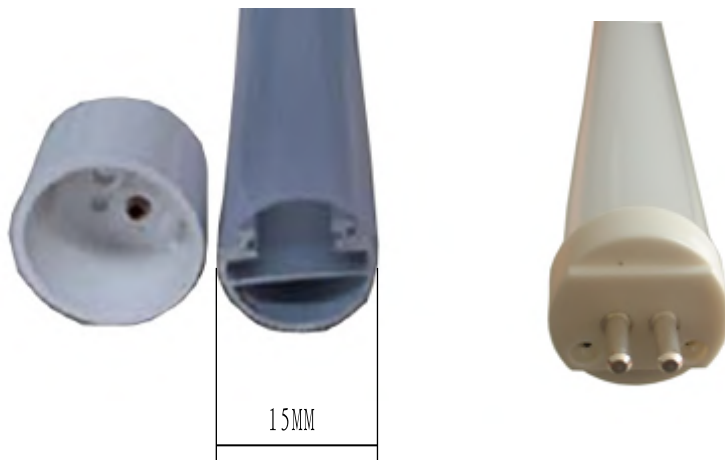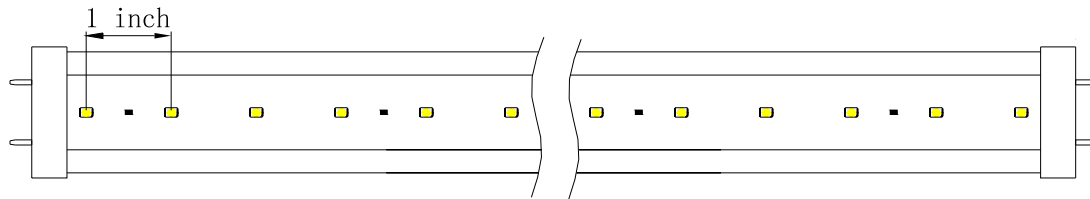

Datasheet

Part Number	Color	Wavelength	Voltage	LED NO.	Intensity	View Angle	Power	Length
GNL-T5UW-48SMD-CW-D	Super white	5500k~7000k	12VDC 24VDC	48	1200lm	80°	2.4 W	48inch
GNL-T5UW-48SMD-WW-D	Warm white	2700k~4100k	12VDC 24VDC	48	900lm	80°	2.4 W	48inch
GNL-T5UW-36SMD-CW-D	Super white	5500k~7000k	12VDC 24VDC	36	1000lm	80°	1.8 W	36inch
GNL-T5UW-36SMD-WW-D	Warm white	2700k~4100k	12VDC 24VDC	36	700lm	80°	1.8 W	36inch
GNL-T5UW-24SMD-CW-D	Super white	5500k~7000k	12VDC 24VDC	24	700lm	80°	1.2W	24inch
GNL-T5UW-24SMD-WW-D	Warm white	2700k~4100k	12VDC 24VDC	24	500lm	80°	1.2W	24inch
GNL-T5UW-48SMD-CW-C	Super white	5500k~7000k	12VDC 24VDC	48	1200lm	80°	2.4 W	48inch
GNL-T5UW-48SMD-WW-C	Warm white	2700k~4100k	12VDC 24VDC	48	900lm	80°	2.4 W	48inch
GNL-T5UW-36SMD-CW-C	Super white	5500k~7000k	12VDC 24VDC	36	1000lm	80°	1.8 W	36inch
GNL-T5UW-36SMD-WW-C	Warm white	2700k~4100k	12VDC 24VDC	36	700lm	80°	1.8 W	36inch
GNL-T5UW-24SMD-CW-C	Super white	5500k~7000k	12VDC 24VDC	24	700lm	80°	1.2W	24inch
GNL-T5UW-24SMD-WW-C	Warm white	2700k~4100k	12VDC 24VDC	24	500lm	80°	1.2W	24inch