

LIGHTEN OUT YOURS LIFEWAY


FEATURES:

- Instead of Neon lamp, As a light source apply to Channel Letter, Sign....
- Use ultra brighter wide view angle Flux LED lamp. The power consumption should 80% lower than neon lamp.
- Non - break and consistent current. 50,000 hours operating life.
- Easy installation using fixation clip.
- Environment temperature -40°C - $+100^{\circ}\text{C}$; Humidity $\leq 90\%$
- Suggestion: Channel Letter slot depth 100mm

GN-KING CRYSTAL SERIES




Dimensions of LED modules (UNIT: mm)

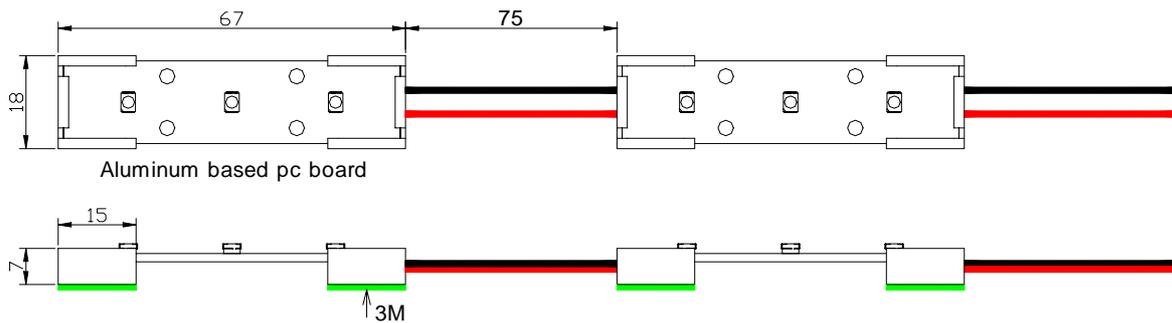


LIGHTEN OUT YOURS LIFEWAY

Sample of how to drive the modules


GNVA12030M

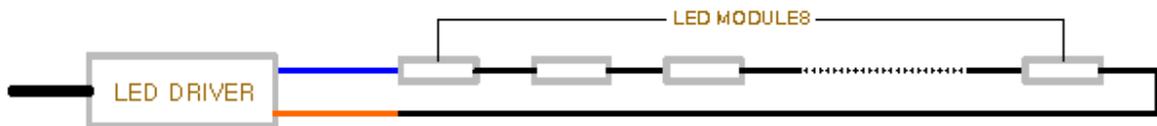

GNVA12060P

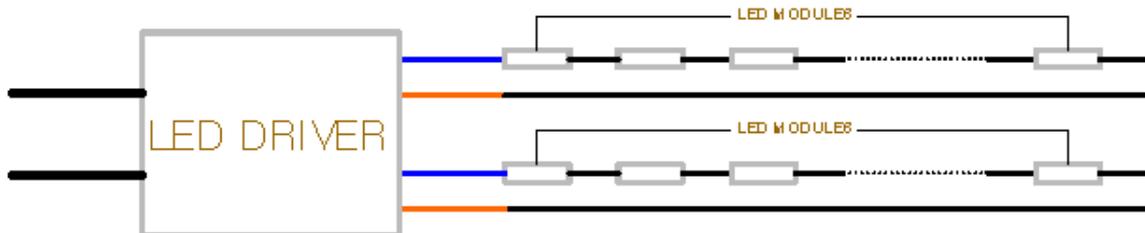

GNVA-12150T

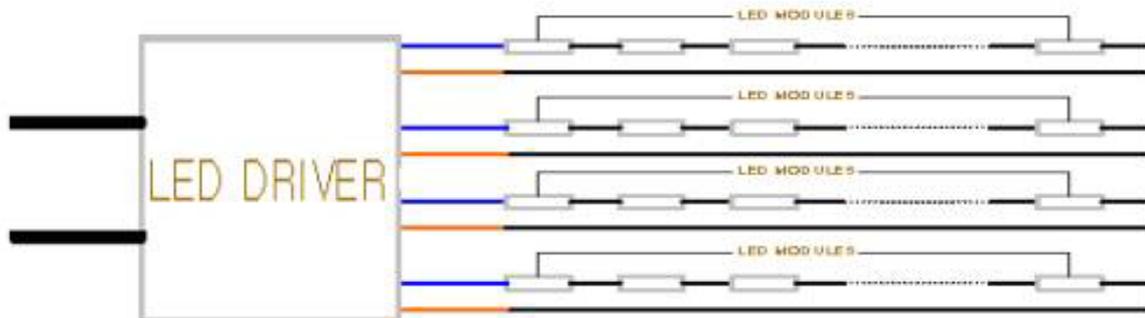

G-NOR

LIGHTEN OUT YOURS LIFEWAY

Data specification

Part No.	Color	Wavelength	Voltage	LED No.	Wire	Lumen	View angle
GN-CLM-KC-3R	Red	629nm	12VDC	3	75mm	3.0lm	120°C
GN-CLM-KC-3Y	Yellow	594nm	12VDC	3	75mm	6.0lm	120°C
GN-CLM-KC-3G	Green	525nm	12VDC	3	75mm	11.0lm	120°C
GN-CLM-KC-3B	Blue	470nm	12VDC	3	75mm	4.5lm	120°C
GN-CLM-KC-3W	White		12VDC	3	75mm	12.0lm	120°C

TYPE OF LED MODULES	TYPE OF LED DRIVERS		
	GNVA-12030M PCS/DRIVER	GNVA-12060P PCS/DRIVER	GNVA-12150T PCS/DRIVER
GN-CLM-KC-3R	Max.80	Max.160	Max.400
GN-CLM-KC-3Y	Max.80	Max.160	Max.400
GN-CLM-KC-3G	Max.80	Max.160	Max.400
GN-CLM-KC-3B	Max.80	Max.160	Max.400
GN-CLM-KC-3E	Max.80	Max.160	Max.400

Power Supply: LED special power supply.

Standard pack: 100 modules per pack.

Mounting: Adhesive tape on the back of the module or bolt.

Tel: (86 574) 87503097, 87502706, 87503023

Fax: (86 574) 87503457

E-mail: info@g-nor.com

G-NOR 